



SENSOR READY G3SW LUMINAIRE


DESCRIPTION

Jaykal's new sensor ready design enables Basic or Network Sensors to be installed by simply removing the blank sensor cover and snapping in the sensor. If no controls are needed now, they may be added later, using this simple installation feature. The fixture is suitable for commercial and retail applications.

Wattage and color selectability is standard, allowing field tuning to meet changing project requirements. It features four wattage presets and five color presets and is DLC listed.

FEATURES

- Available in 12W to 38W Mul-Wattage Driver
- CCT: 2700K/3000K/3500K/4000K/5000K Selectable
- 150 lm/W
- 0-10V Dimming
- 5 Year Standard Warranty

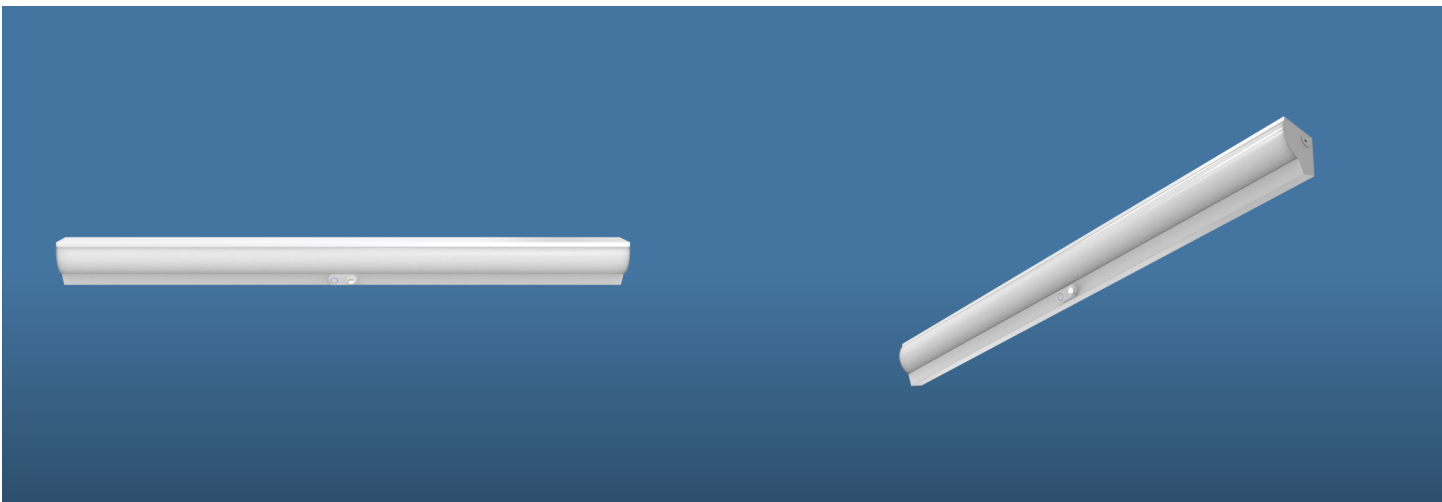


Revised 5/20/2026

Specifications are typical values and may change without notification




DIMENSIONS (Unit : mm/Inch)

Unit: inch(mm)

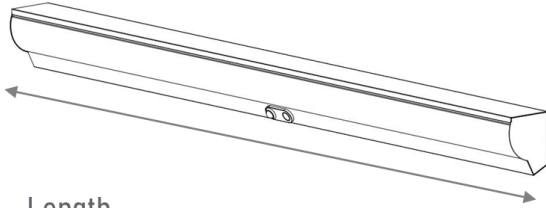

Length
2ft: 23.9(608) 4ft: 47.9(1216)

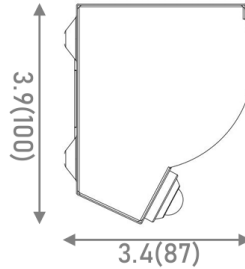

3.9(100)

3.4(87)

ORDERING GUIDE

MODEL	SIZE	WATTAGE	CCT	EMERGENCY	DESIGNATION
JLS-G3SW	2 = 2FT	M1 = 13W/17W/21W/26W	8MCCT = 27K/30K/35K/40K/50K	N = None EM = Emergency Backup	[TAA] [COM]
	4 = 4FT	M2 = 34W/40W/47W/53W			

Compatible Controls Guide

BRAND	MODEL	SENSOR TYPE
LUMALINX	JLS-ESS-IFS06R	BASIC
LUMALINX	JLS-ESS-RM-51	REMOTE CONTROL PROGRAMMER
LUMALINX	JLS-LLE-IFS108.B2	NETWORK

Specifications are typical values and may change without notification