



G3 MAGNETIC RETROFIT KIT


DESCRIPTION

The Magnetic LED Retrofit Kit is a high-performance, field-adaptable lighting solution engineered to upgrade existing luminaires to energy-efficient LED technology with minimal installation time and complexity. Utilizing integrated magnetic mounting and a remote or onboard driver, the system enables rapid deployment across a wide range of fixture types.

Designed for maximum versatility with sensor ready feature, this retrofit kit supports virtually unlimited applications, making it ideal for standardization across diverse facility portfolios.

FEATURES

- Driver Options: Fixed Wattage, Vari-Watt Driver or Vari-Wattage Emergency
- CCT Options: 3000K, 3500K, 4000K, 5000K
- SE 163lm/W or HE 180lm/W Efficacy
- 10 Year Standard Warranty
- Thinner Profile for a Wider Range of Applications.
- BL/BLG : Bi-level dimming/Bi-level Dimming and Grouping Function
- Available G3-MGT-BRIDGE Accessory Allows a Two Bar Kit to be Retrofitted in Three Lamp Troffer.
- Comes with Quick Connects Standard
- DLC Listed as Linear Retrofit Kit. May qualify for higher rebates than LED Linear Lamps.

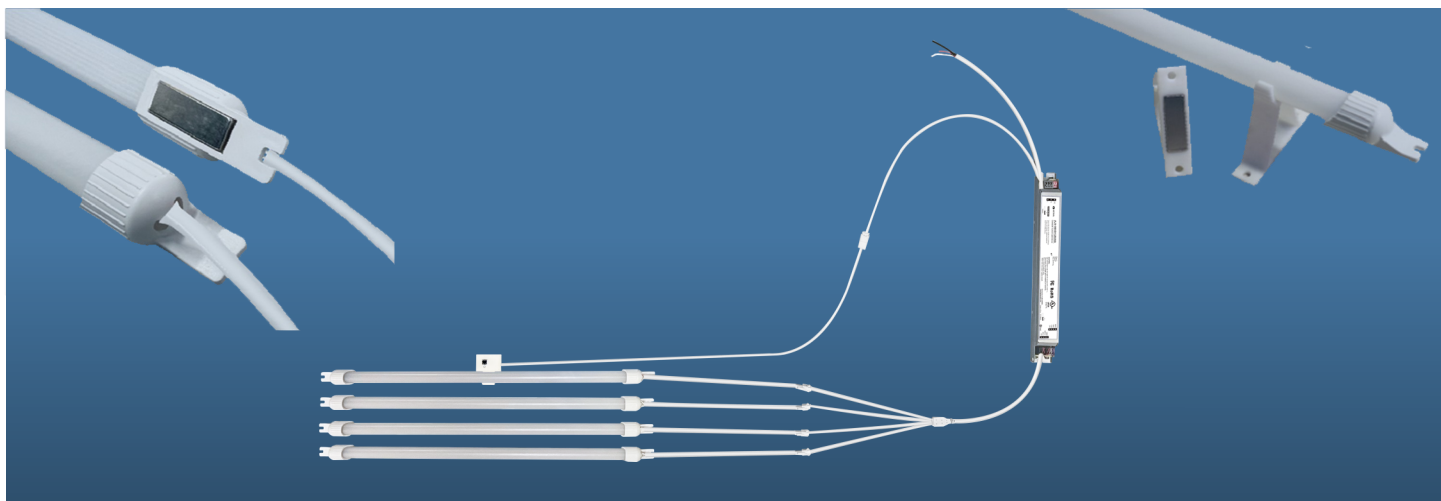



SPECIFICATIONS

VW DRIVER	M1						M2						M3					
VW PRESETS	7W	9W	10W	11W	12W	15W	18W	20W	22W	24W	27W	30W	33W	36W	40W	44W	50W	55W
(180lm/W)	1,260	1620	1,800	1,980	2,160	2,700	3,240	3,600	3,960	4,320	4,860	5,400	5,940	6,480	7,200	7,920	9,000	9,900
(163lm/W)	1,141	1,467	1,630	1,793	1,956	2,445	2,934	3,260	3,586	3,912	4,401	4,890	5,379	5,868	6,520	7,172	8,150	8,965
INPUT VOLTAGE	100-277VAC 50/60hz																	
EFFICACY	≈163lm/W (Standard Efficiency) or ≈180lm/W (High Efficiency)																	
POWER FACTOR	>0.95@120V / >0.9@277V																	
DC DRIVE VOLTAGE	38.5VDC Nominal																	
THD	<15%																	
CRI	>80																	
L70 HOURS	113,000 Hours																	
CCT	3000K/3500K/4000K/5000K																	
PROTECTION	Integral short circuit, open circuit, and overload protection																	
SURGE PROTECTION	L-N 1KV, LN-G 2KV																	
OPERATING TEMP.	-20°C to 50°C																	
STORAGE TEMP.	-20°C to 70°C																	
FCC	FCC 47 CFR Part 15 Compliance																	

ORDERING GUIDE

EXAMPLE: JLS-G3MGT-4FT-840K-M2-10-S-2-SE

MODEL	LENGTH	CCT	WATTAGE	DRIVER	FF OPTION	LIGHT BARS	SENSORS	EFFICACY
JLS-G3MGT	1FT = 1 FT. 2FT = 2 FT. 3FT = 3 FT. 4FT = 4 FT.	830K = 3000K 835K = 3500K 840K = 4000K 850K = 5000K 8DCCT1 = Dual CCT 30K/40K * 8DCCT2 = Dual CCT 35K/40K * 8DCCT3 = Dual CCT 40K/50K * * DCCT is not available for 1FT	Vari-Watt (VW) M1 = (7W/9W/10W/11W/12W/15W) M2 = (18W/20W/22W/24W/27W/30W) M3 = (33W/36W/40W/44W/50W/55W) Vari-Watt (EMVW) EM1 = (10W/14W/18W/22W) EM2 = (15W/22W/27W/33W) EM3 = (24W/30W/36W/40W) EM4 = (38W/43W/48W/55W)	10 = 0-10V Dimming 50 = Bi-Level Dimming	S = Standard FF = Flicker-Free	1 = One Bar 2 = Two Bars 3 = Three Bars 4 = Four Bars Power Handling 4ft. Max 20W ea. 3ft. Max 15W ea. 2ft. Max 10W ea. 1ft. Max 5W ea.	Blank = No Sensor BL = Occupancy Bi-Level Dimming BLG = Occupancy Bi-Level Dimming With Grouping Function	SE = 163lm/W HE = 180lm/W

CONTROLS

BRAND	MODEL	SENSOR TYPE
LumaLinx	JLS-ESS-EIFS08	BASIC MICROWAVE SENSOR, STAND ALONE
LumaLinx	JLS-ESS-RM-51	REMOTE CONTROL PROGRAMMER
LumaLinx	JLS-LLE-FA102.C1 + JLS-LLE-MWS108E	Bluetooth Adapter + Microwave sensor with a magnetic mount




Specifications are typical values and may change without notification





G3MGT ACCESSORY

MODEL	DESCRIPTION
JLS-G3MGT-BRIDGE	1 PAIR BAR BRIDGES
JLS-G3MGT-CLIP	Center Clips

Dimensional Drawings

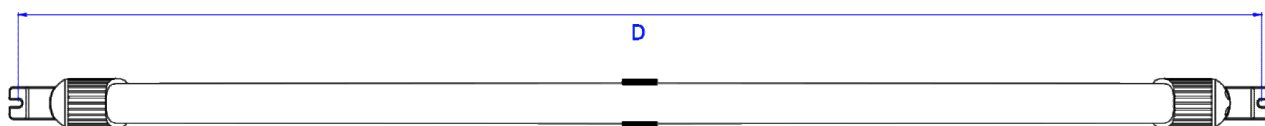

Product	Length End to End (in.)	Length Mounting Center (in.)	B) Diameter (in.)	(A) Width (in.)
4 Foot	44.13	43.82	.80	.87
3 Foot	33.11	32.80		
2 Foot	19.92	9.61		
1 Foot Unit MM	11.02	10.71		

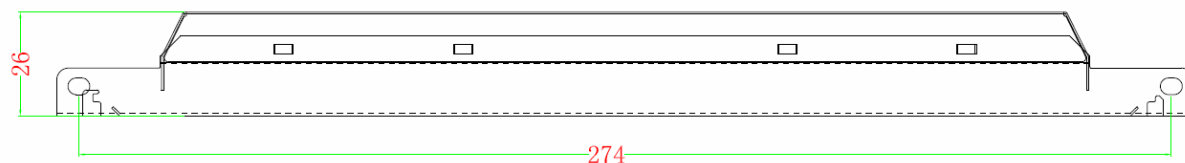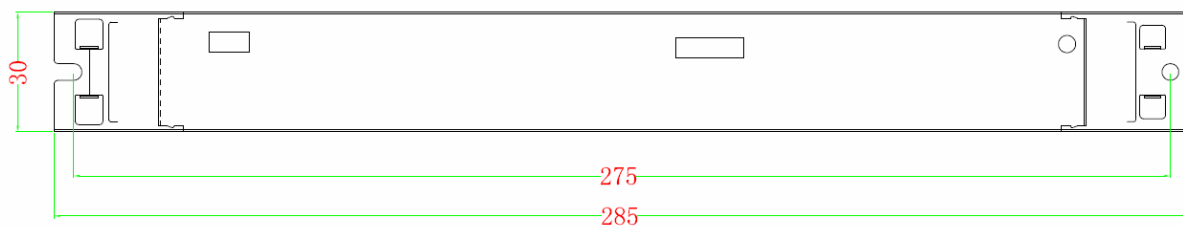


Specifications are typical values and may change without notification



JAYKAL
efficiency. illuminated

G3 MAGNETIC RETROFIT KIT

QUICK CONNECT DESIGN

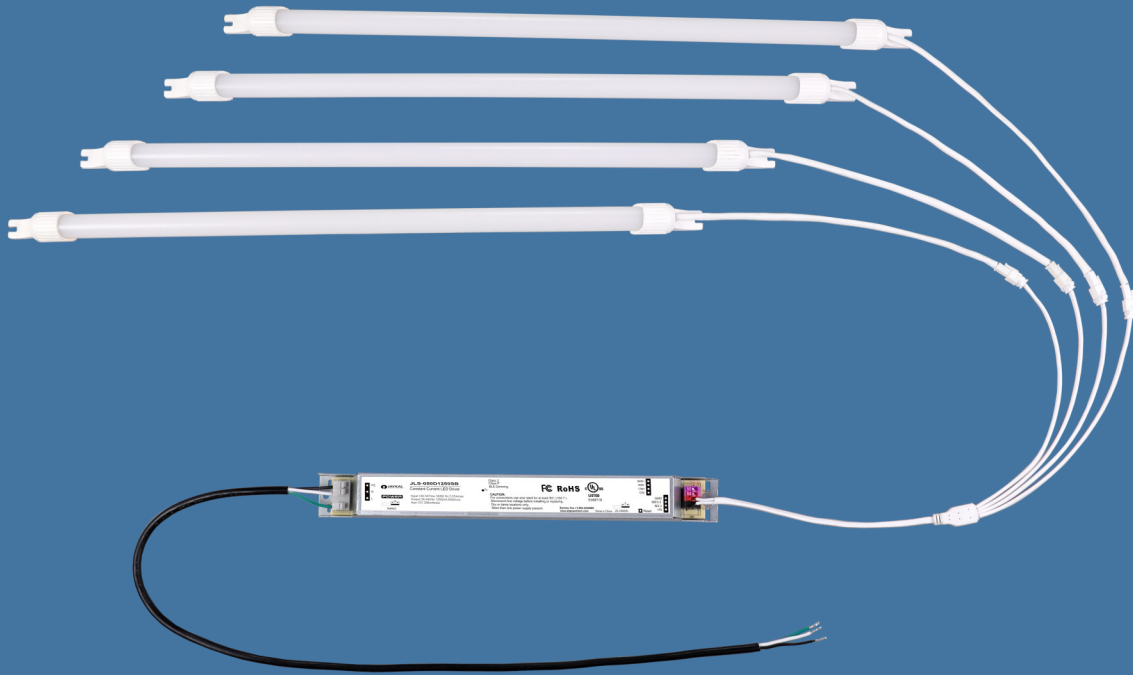

Specifications are typical values and may change without notification

efficiency. illuminated.