

LED POST TOP LIGHT INSTALLATION INSTRUCTIONS



IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.


Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON

FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

POLE MOUNT


1. Make the wiring connections with UL approved connectors knot the wires for strain relief.
2. Round Pole Adapter can fit with 3" or 2 3/8" diameter. Slip Round Pole Adaptor over tenon. For 3" Pole use shorter (3/8") pole set screw and for 2 3/8" pole use longer (7/8") pole set screws to secure the fixture to the pole.

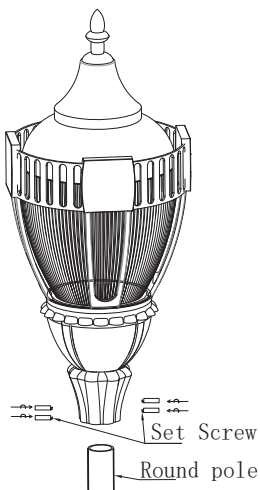

Wiring

Universal voltage driver permits operation at 100V to 277VAC, 50 or 60Hz

1. Connect the black fixture line to the (L) Live line supply wire.
2. Connect the white fixture line to the (N) Neutral line supply wire.
3. Connect the green fixture line to the (G) Ground line supply ground.

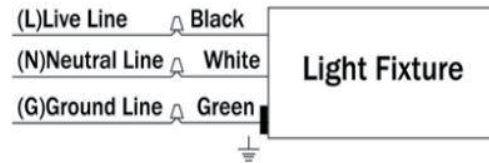

CLEANING & MAINTENANCE:

CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while Fixture is energized.

1. Clean glass lens with non-abrasive glass cleaning solution.
2. Do not open fixture to clean the LED. Do not touch the LED

TROUBLESHOOTING

1. Check that the line voltage at fixture is correct. Refer to wiring directions.
2. Is the fixture grounded properly?

Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.