

Wiring Diagram

Option 1 : Without 12VDC AUX



Option 2 : With 12VDC AUX




Option 3 : With 12VDC AUX and CCT selectable function




Wattage Selection Diagram


M1 type (0715)

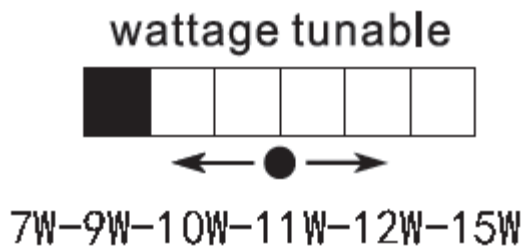



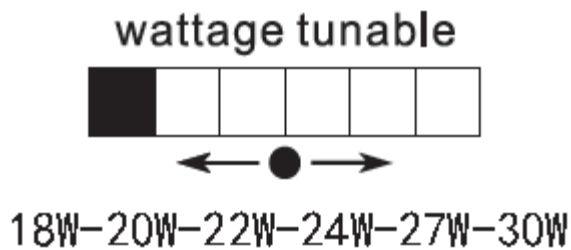

M2 type (1830)

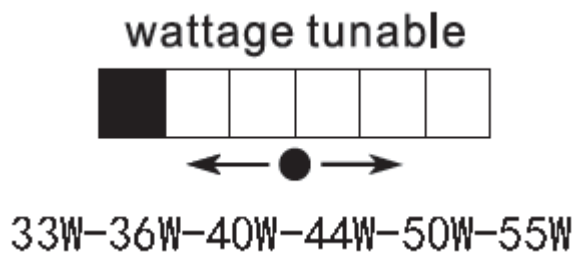

M3 type (3355)



Brightness Selection Diagram

ON 	ON 	ON 	ON 
Disable Bi level dimming	60% Bi level dimming	50% Bi level dimming	40% Bi level dimming