


INSTRUCTIONS

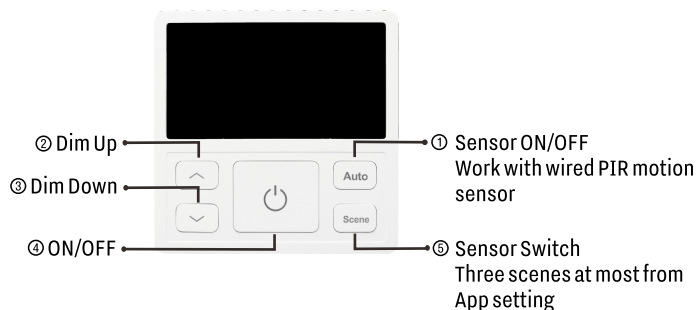

1. This device can be powered by 3 different ways, which include CR2032 battery, external USB cable or solar panel on the front. Recommended to install battery before using it, battery can be installed in battery case from the back.
2. Install 1pcs CR2032 battery or 5V USB power supply.
3. Press button "Auto" and "∧" together over 2 seconds to enter pairing mode and achieve reset function. This switch can be scanned in next 30 seconds.
4. In Keilton App "Switch" page, click to add the switch.
5. Select the light/light group to be controlled by this switch.
6. Select 3 scenes to be controlled by this switch.

TIPS: This Bluetooth device is compatible with Keilton lighting control system only.

How to Install Keilton APP?

Scan below QR code for downloading the APP.



How to Control Lights with a Phone?

Scan to download Keilton APP instruction



WARRANTY INFORMATION

Our company warrants this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.

Contact: sales@litetrace.com