

JLS-LLE-WF20R SERIES

JAYKAL

PROJECT NAME:

JAYKAL LED SOLUTIONS, INC.

www.jaykal.net

PROJECT NOTES:

21499 Baltimore Ave.

Georgetown, DE 19947

(P) 302-295-0015



(F) 302-295-0016

PRODUCT DESCRIPTION

The JLS-LLE-WF20R is a Bluetooth-enabled 20A Plug Load Controller that seamlessly integrates with the LumaLinX ecosystem, offering advanced control and monitoring capabilities. Controllable via the LumaLinX App, it provides intuitive manual on/off operation, app-based control, scheduling, and grouping with LumaLinX sensors. Featuring dual receptacles with one controlled for load management and one uncontrolled for code compliance, the JLS-LLE-WF20R interoperates with other LumaLinX products for comprehensive building automation.

FEATURES

- Bluetooth reset button
- LED indicator light
- Provides a full 20A load capability
- Accepts standard Decora cover plate (not included)
- Tamper resistant and commercial grade
- 1HP motor load rated

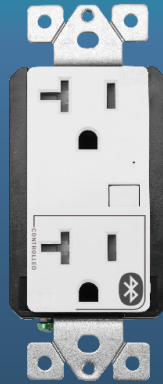

JLS-LLE-WF20R SERIES

JAYKAL

SPECIFICATIONS TABLE

JLS-LLE-WF20R SERIES


INPUT VOLTAGE	120VAC
FREQUENCY	60Hz
LOAD RATING	2400W(20A)
MOTOR	1HP
BLUETOOTH TRANSMIT	100ft Max
RADIO FREQUENCY	2.4GHz ± 75MHz
BLUETOOTH VERSION	5.0
HOUSING MATERIAL	UL 94V-5A
OPERATING TEMPERATURE	-30°C to 55°C, -22°F to 131°F
STORAGE TEMPERATURE	-30°C to 85°C, -22°F to 185°F
IP RATING	IP20
COLOR	Plate/White,Housing/Black
WARRANTY	5 Years
COMPLIANCE	UL244A, RoHS

Due to our continued efforts to improve our products, specifications are subject to change without notice.

Ordering Guide

MODEL	Description
JLS-LLE-WF20R.A0	Bluetooth Plug Load Controller

WIRING

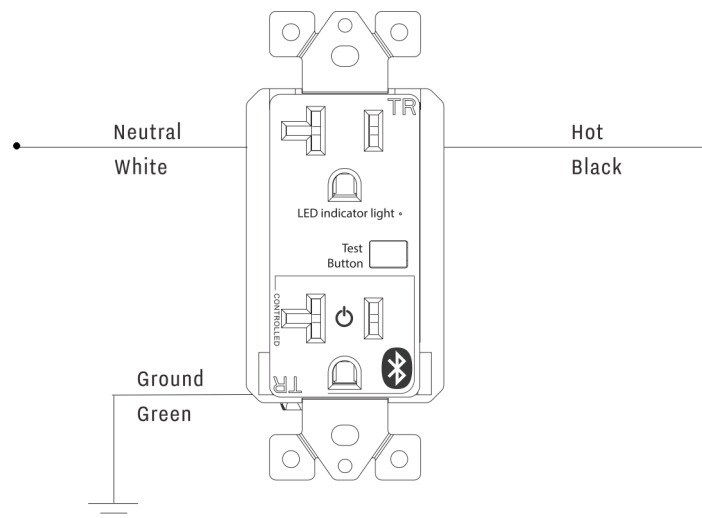

Specifications are typical values and may change without notification


efficiency. illuminated.

JLS-LLE-WF20R SERIES


JAYKAL

DIMENSIONS

Unit:inch/mm

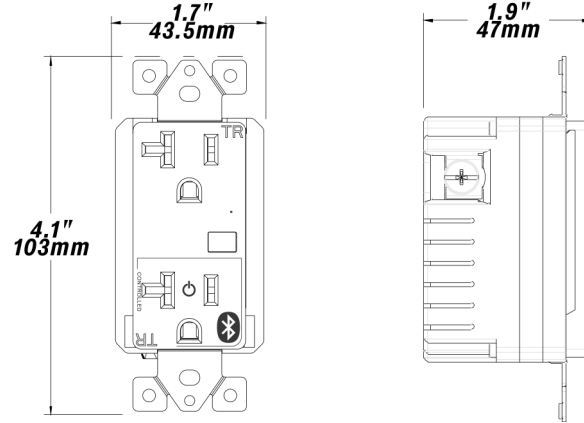

PRODUCT LABEL

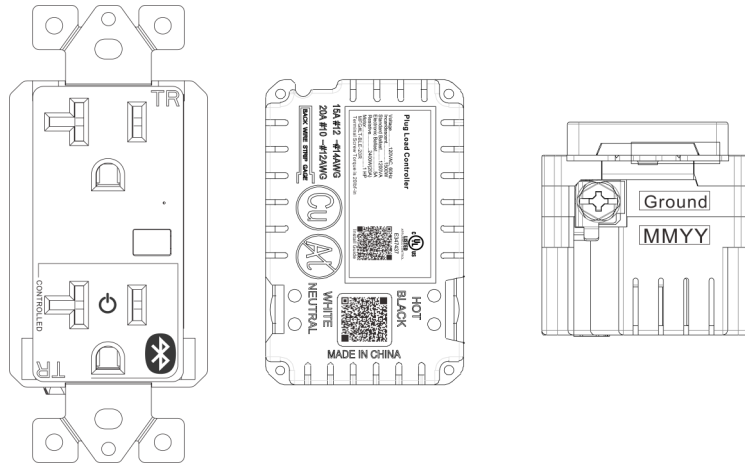

APP DOWNLOAD



Specifications are typical values and may change without notification

efficiency. illuminated.