

CR SERIES FLICKER FREE DOWN LIGHT



PRODUCT DESCRIPTION

Wattage and color selectability is standard, allowing field tuning to meet changing project requirements. It features three wattage presets, three color presets and is DLC listed.

FEATURES

- 3 Selectable Wattages
- 120-277Vac 50/60Hz
- CCT: 3 Selectable CCTs, 3000K/3500K/4000K or 3000K/4000K/5000K
- Dual Selectable Design
- 5 Year Standard Warranty



SPECIFICATIONS TABLE


MODEL	JLS-CR SERIES				
SIZE	4 inch	6 inch		8 inch	10 inch
WATTAGE CODE	M1	M2	M3	M4	M5
WATTAGE PRESETS	6W/8W/12W	8W/12W/16W	20W/26W/33W	12W/16W/22W	22W/28W/33W
INPUT VOLTAGE	120-277VAC 50/60 Hz				
POWER FACTOR	>0.9@277VAC				
THD	<20%				
LUMENS@ 80CRI	560/720/980	780/1,080/1,380	2,350/3,000/3,700	1,250/1,620/2,250	2,100/2,600/3,050
LUMENS@ 90CRI	460/600/800	640/890/1,140	1,600/2,050/2,500	1,030/1,350/1,880	1,760/2,200/2,500
EFFICACY	77-94 lm/W				
CRI	80/90				
CCT	3000K/3500K/4000K Selectable or 3000K/4000L/5000K Selectable				
FLICKERING INDEX	<10% (Flicker-Free)				
LIFE (L70)	50,000+ Hours				
PROTECTION	IP44				
CERTIFICATIONS	CE/RoHS/ETL/Energy Star/ T24/FCC CFR Part 15 Class A				
SURGE PROTECTION	Ring-wave interference 2500V				
ENVIRONMENT	Indoor and Damp Locations				
TEMP. RATING	Designed to operate in temperatures 45°C and below room side and plenum side.				
DIMMING CONTROL	0-10V				
WARRANTY	5 Year				
DIAMETER	4 / 6 / 8 / 10 Inch				

Ordering Guide


MODEL	SIZE	WATTAGE	CRI	CCT	DRIVER	OPTION
JLS-CR	4 = 4 Inch 6 = 6 Inch 8 = 8 Inch 10 = 10 Inch	M1 = (6W, 8W, 12W) * M2 = (8W, 12W, 16W) ** M3 = (20W, 26W, 33W) ** M4 = (12W, 16W, 22W) *** M5 = (22W, 28W, 33W) *** *only for 4 Inch Can **only for 6 Inch Can ***only for 8 Inch Can ***only for 10 Inch Can	8 = 80CRI 9 = 90 CRI	MCCT1 = (3,000K, 3,500K, 4,000K) MCCT2 = (3,000K, 4,000K, 5,000K)	FF = Flicker-Free	Blank = No option EM = Emergency Back Up

Specifications are typical values and may change without notification


DIMENSIONS

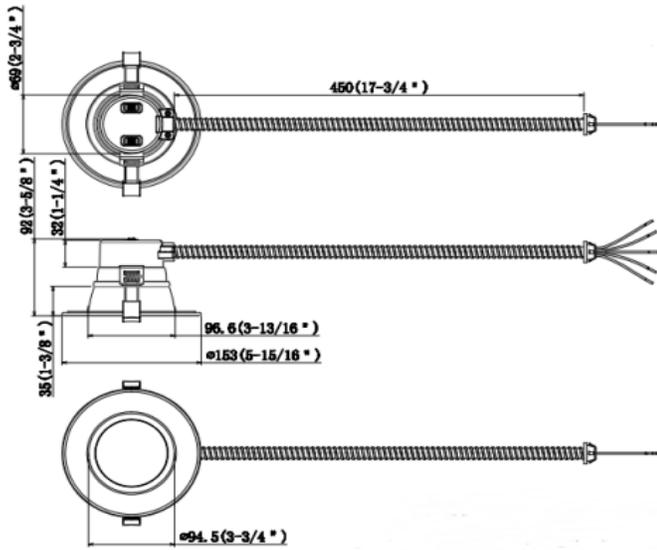


4-INCH

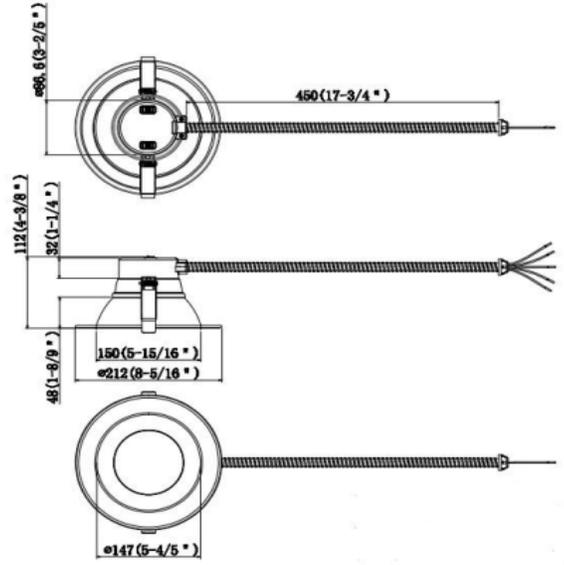

6-INCH

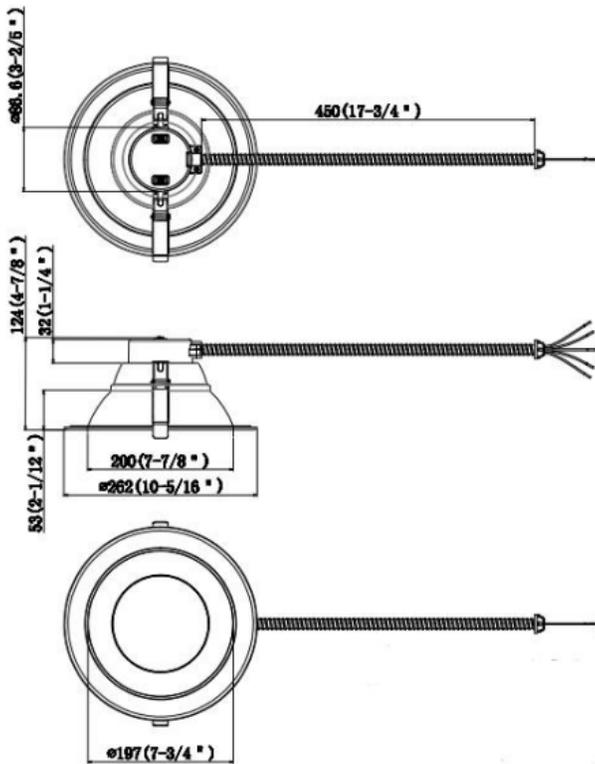

8-INCH

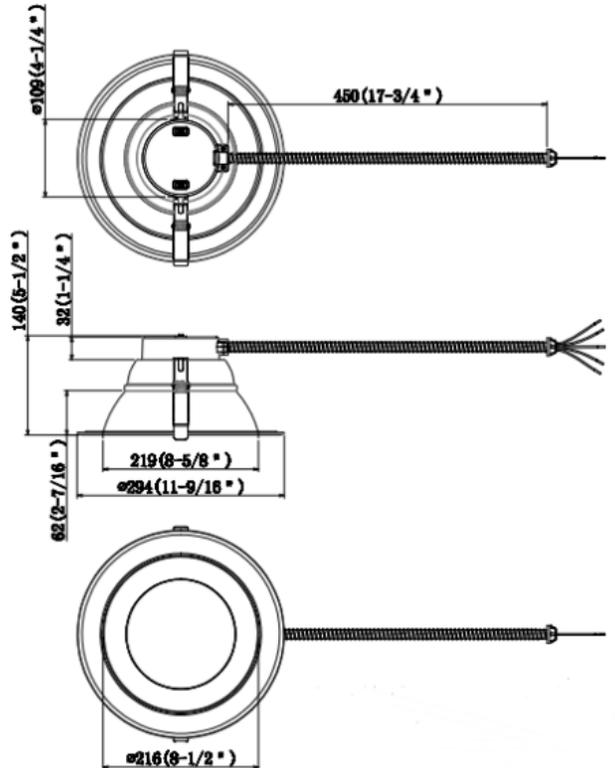

10-INCH

Specifications are typical values and may change without notification