


KEY FEATURES

- ◆ Available in 2,3 and 4 ft. Lengths
- ◆ 100-277VAC Type C
- ◆ CCT: 3000K/3500K/4000K/5000K
- ◆ 330° Viewing Angle
- ◆ TAA Available
- ◆ Suitable for Open and Enclosed Fixtures
- ◆ Compatible With Controls
- ◆ For Use with Shunted and Unshunted Lampholders
- ◆ 5 Year Warranty 24/7 Operation
- ◆ Flicker Free Option
- ◆ 0-10V Dimming and 50-50 Bi-Level Dimming Option
- ◆ Compatible with Most Emergency Backups (Contact Jaykal for Additional Information)

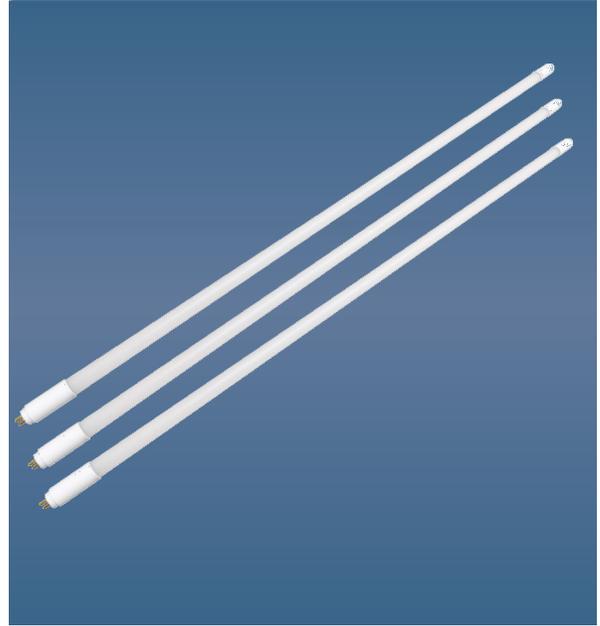

Revised 12/1/25

ORDERING GUIDE				JLS -G2T5-2-840K-M1-EX-10-S-2-S						
MODEL	LENGTH	CCT	WATTS	TYPE	DIMMING	FLICKER RATE	LAMPS	EFFICACY		
JLS-G2T5	2 = 2 Foot 3 = 3 Foot 4 = 4 Foot	830K = 3000K 835K = 3500K 840K = 4000K 850K = 5000K	Vari-Watt Drivers (VW) M1 = (7W/9W/10W/11W/12W/15W) M2 = (18W/20W/22W/24W/27W/30W) M3 = (33W/36W/40W/44W/50W/55W) Vari-Watt (VWEM) EM1 = (12W/16W/20W/24W) EM2 = (18W/24W/30W/36W) EM3 = (24W/30W/36W/40W) EM4 = (40W/45W/50W/60W) POWER CAPACITIES 2T5 = 10 Watts per Lamp 3T5 = 15 Watts per Lamp 4T5 = 20 Watts per Lamp	EX = External	10 = 0-10V 50 = Bi-Level	S = Standard FF = Flicker Free	1 = 1 Lamp 2 = 2 Lamp 3 = 3 Lamp 4 = 4 Lamp	S = 150 lm/W P = 160 lm/W		

PRODUCT	LENGTH PIN to PIN (in.)	LENGTH BASE to BASE (in.)	DIAMETER (in.)
4 Foot	45.8	44.82	0.625
3 Foot	34.0	33.02	0.625
2 Foot	22.2	21.22	0.625

WIRING DIAGRAM

External Driver LED Lamps

