




FORWARD THROW WALL PACK

DESCRIPTION

Jaykal's LED Forward Throw Wall Pack is a high performance exterior luminaires designed to deliver precise, forward-directed illumination for enhanced perimeter, pathway, and building façade lighting. Utilizing advanced LED optics, the fixture provides superior forward light distribution while minimizing backlight, uplight, and glare, improving visibility, security, and light trespass requirements.

FEATURES

- Wattage Selectable: From 45W to 120W
- CCT Selectable: 3000K/4000K/5000K
- 0-10V Dimming Standard
- Photocell Optional
- Motion Sensor Optional
- EM backup optional
- TAA Available

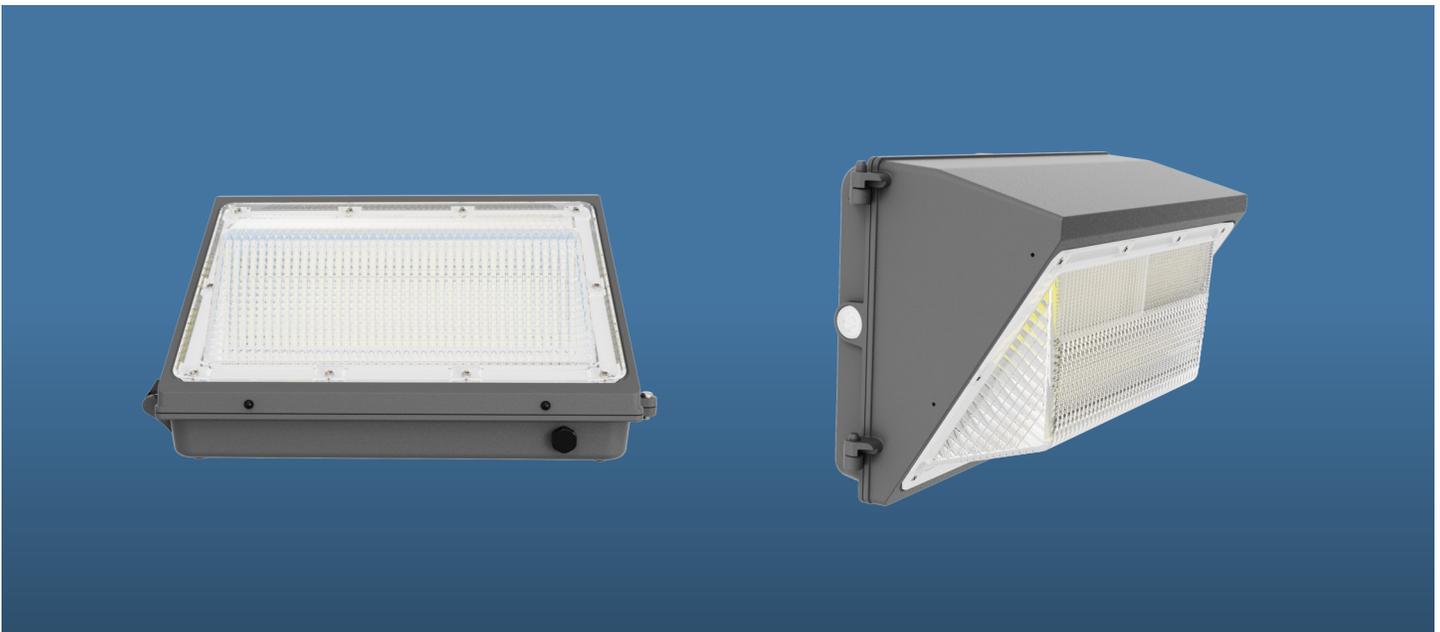

Revised 2/25/2026

Specifications are typical values and may change without notification



SPECIFICATIONS

SPECIFICATIONS	JLS-G4FT	
INPUT VOLTAGE	120-277VAC 50-60HZ / 277-480VAC 50-60HZ	
TYPE	M1	M2
WATTAGE	45W/60W/80W	90W/100W/120W
EFFICACY	140lm/W	
LUMENS	6,300lm/8,400lm/11,200lm	12,600lm/14,000lm/16,800lm
POWER FACTOR	>0.9	
THD	≤20%	
CRI	>70	
CCT PRESETS	3000K/4000K/5000K Selectable	
DIMMING TYPE	0-10V	
DIMMING SINK CURRENT	<5mA	
HOURS (L70)	50,000+ Hours	
OPERATIONAL TEMP.	-40°C to 45°C	
SURGE PROTECTION	6KV Standard / 10KV or 20KV optional	
HOUSING MATERIAL	Aluminum Die Casting	
PROTECTION	Wet Locations (IP65)	
WARRANTY	5 Year Standard with 10 Year Option	
CERTIFICATION	UL/DLC	

ORDERING GUIDE

EXAMPLE: JLS-G4FT-M1-277-7MCCT-BR-PC-#

MODEL	-	WATTAGE	-	VOLTAGE	-	CCT	-	HOUSING	-	OPTIONS	-	CODE
JLS-G4FT		M1 = 45/60/80W M2 = 90/100W/120W		277 = 120-277VAC 480 = 277-480VAC		7MCCT = 3000K/4000K/5000K		BR = Bronze		N = No option PC = Photocell MS = Motion Sensor		[TAA #]

EM BACKUP

JLS-G4FT-EM	Emergency Back Up
-------------	-------------------

BASIC SENSORS

JLS-BUTTON-PC	Field Installed Button Photocell (PC option in ordering guide is factory installed)
JLS-ESS-EFS06R	PIR Motion Sensor with HOLD ON/OFF Photocell
JLS-ESS-RM51	Programming Remote

Specifications are typical values and may change without notification



LumaLinx ENHANCED SENSORS

JLS-LLE-WPPA102-AUX	0-10V Dimming 3.5mm jack, LR Antenna Round Waterproof Bluetooth Controller Node
JLS-LLE-EFS106-AUX-W	High Bay Long Range Bluetooth Sensor
JLS-LLE-WSC03-AUX	AUX Swivel Extension Arm



JLS-LLE-WPPA102-AUX



JLS-ESS-EFS06R



JLS-BUTTON-PC



JLS-ESS-RM51





JLS-LLE-EFS106-AUX-W



JLS-LLE-WSC03-AUX

DIMENSIONS (Unit: inch)

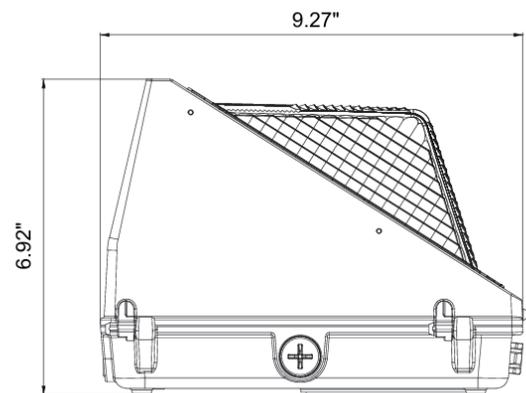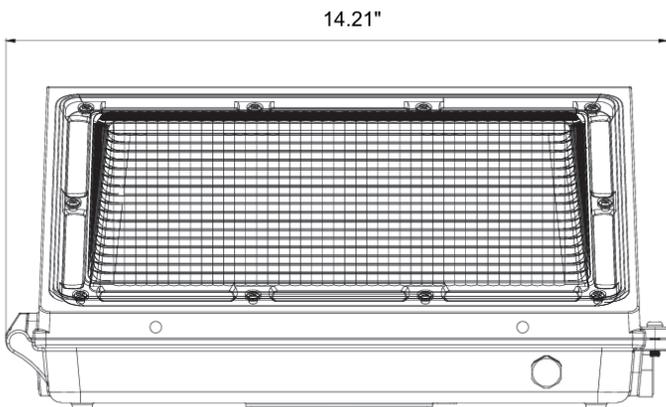

Specifications are typical values and may change without notification