




## LOW PROFILE WAFER STYLE DOWNLIGHT

### DESCRIPTION

The wafer-thin JLS-SD downlight with remote driver combines quality lighting and while eliminating the need for a large housing. This ultra thin design is appropriate for remodel or new construction with an optional frame-in kit sold separately for pre-wiring.

### FEATURES

- 4 Size Options
- 120Vac 50/60Hz
- CCT: 5 Selectable CCTs, 2700L/3000K/3500K/4000K/5000K
- TRIAC Dimming
- 5 Year Standard Warranty

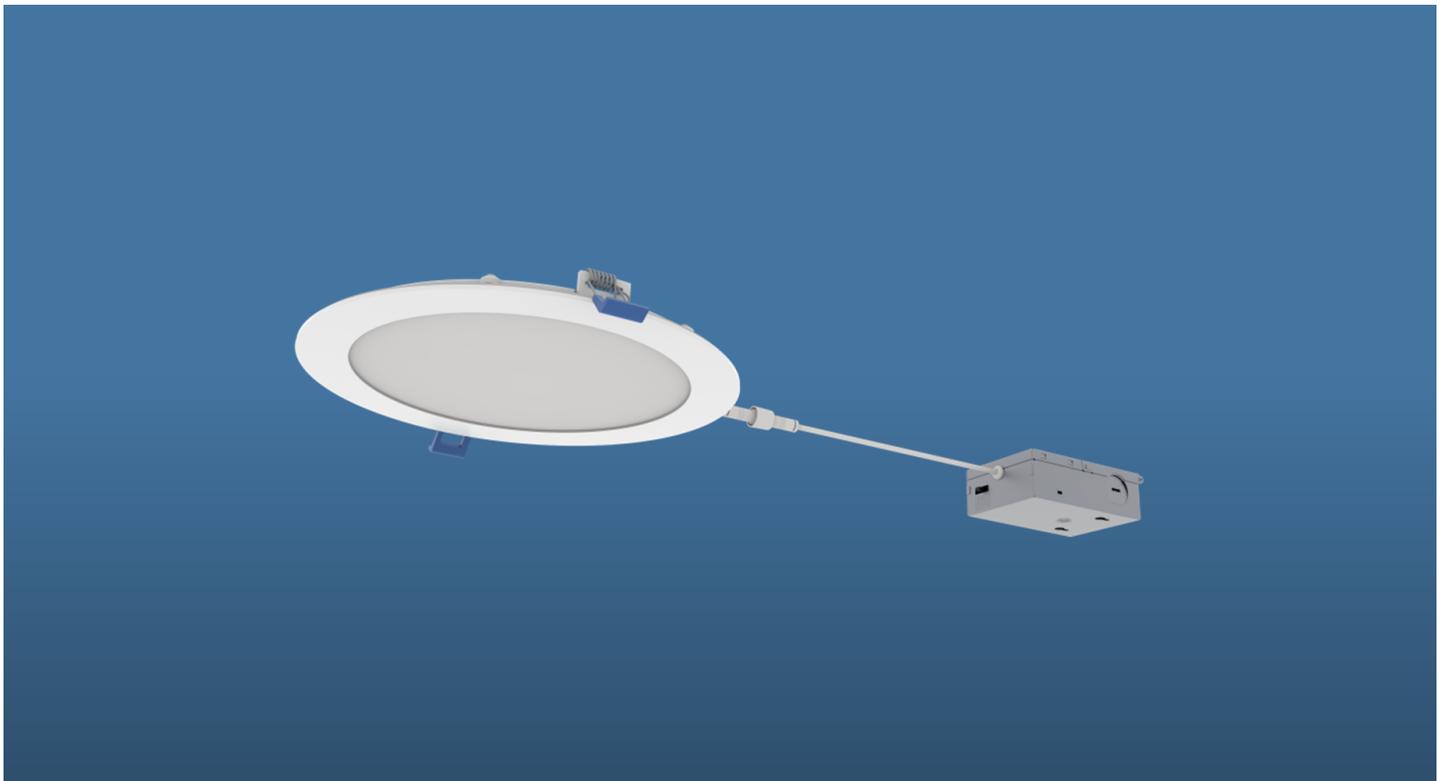

Revised 3/5/2026

*Specifications are typical values and may change without notification*



**SPECIFICATIONS**

SPECIFICATIONS	JLS-SD					
SIZE	3 inch	4 inch		6 inch		8 inch
INPUT VOLTAGE	120Vac 50/60Hz					
TYPE	7W	9W	8/10/12	12	9/12/15	18
EFFICACY (lm/W)	80	83	75-88	83	83	83
LUMENS	560	750	600/850/1,000	1,000	750/1,000/1,250	1,500
POWER FACTOR	>0.9					
THD	≤20%					
CRI	>90					
CCT PRESETS	2700K/3000K/3500/4000K/5000K Selectable					
DIMMING TYPE	TRIAC					
LIFE (L70)	50,000 Hours					
OPERATIONAL TEMP.	-25°C to 40°C					
HOUSING MATERIAL	Die-Casted Aluminum Heatsink + Plastic Diffuser					
PROTECTION	IP44					
WARRANTY	5 Years					
CERTIFICATION	ETL/ES					

**ORDERING GUIDE**

EXAMPLE: JLS-SD-4-9-9MCCT

MODEL	SIZE	WATTAGE	CCT	OPTIONS
JLS-SD	3 = 3 Inch	7 = 7W	9MCCT = 3000K/4000K/5000K	EM = 8W Emergency (Ordered Separately, See Below)
	4 = 4 Inch	9 = 9W M1 = 8/10/12W		
	6 = 6 Inch	12 = 12W M2 = 9/12/15W		
	8 = 8 Inch	18 = 18W		

**EM BACKUP**


JLS-G2EM-08170-HY	Emergency Back Up
-------------------	-------------------

*Specifications are typical values and may change without notification*




ACCESSORIES (SOLD SEPERATLY)

JLS-SD-GF-4/6/8	Goof Ring
JLS-SD-NCPR	3/4/6/8/10in Round New Construction Pans (Universal)
JLS-SD-B	Junction-Box
JLS-SD-HB	T-Grid Bar/ Hanger Bar
JLS-SD-NCPK	New Construction Plate Kits




3/4/6/8 Inch Goof Rings

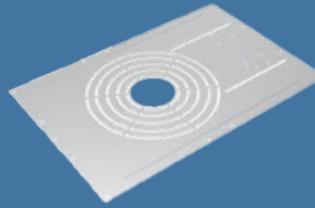

3/4/6/8 Inch Round New Construction Pans



J-BOX-1

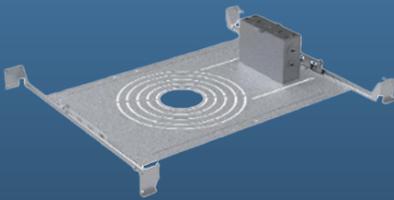


New Construction Plate Kits



T-BAR GRID HANGAR BAR

DIMENSIONS (Unit: inch)

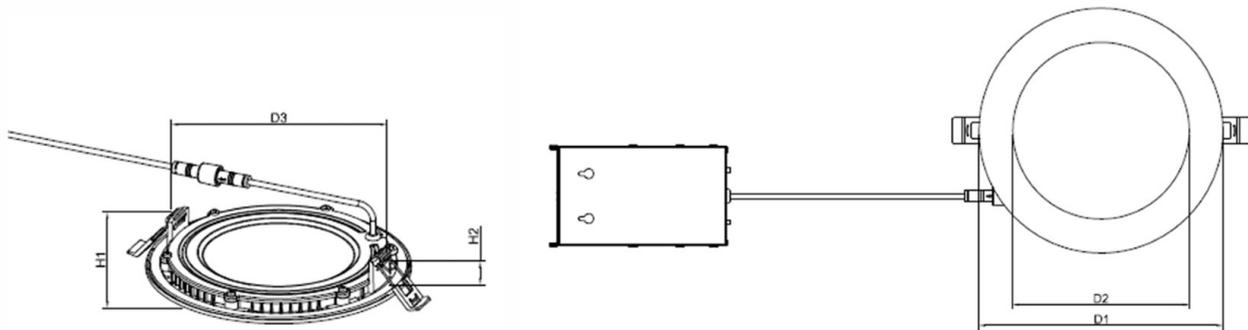


Size	D1	D2	D3	H1	H2	Cut-out
3 inch	85.2mm	48.8mm	70.5mm	23.3mm	15.5mm	76mm
4 inch	120.5mm	79.4mm	105.8mm	23.3mm	15.5mm	110mm
6 inch	170.5mm	127.2mm	153.5mm	23.3mm	15.5mm	160mm
8 inch	223.2mm	175.0mm	202.4mm	23.3mm	15.5mm	203.2mm

*Specifications are typical values and may change without notification*




**OPTICAL DISTRIBUTION**

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 91.19 lm/W
MODEL		I <sub>max</sub> (cd)	379.7	S/MH (C0/180)	1.24	
NOMINAL POWER (W)	11	LOR (%)	100.0	S/MH (C90/270)	1.24	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1045.4	η UP, DN (C0-180)	0.0, 50.0	
NOMINAL FLUX (lm)	1045.42	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

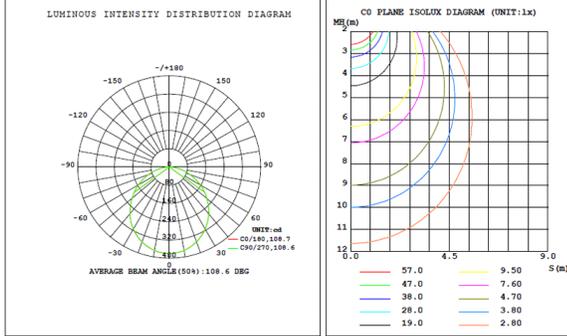

12W

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 91.36 lm/W
MODEL		I <sub>max</sub> (cd)	469.3	S/MH (C0/180)	1.24	
NOMINAL POWER (W)	14	LOR (%)	100.0	S/MH (C90/270)	1.24	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1294.4	η UP, DN (C0-180)	0.0, 49.7	
NOMINAL FLUX (lm)	1294.45	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.3	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35	

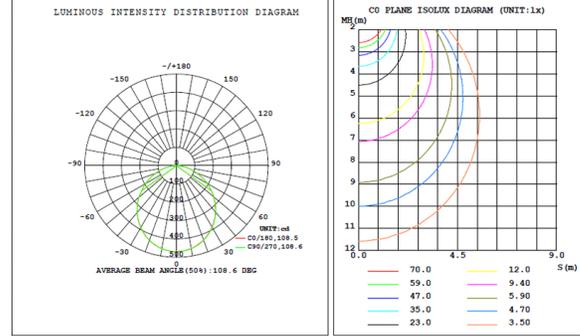

15W

**COMPATIBLE DIMMERS**

NO.	BRAND	MODEL NUMBER	INTERFACE
1	LUTRON	SCL-153P	TRIAC
2	LEVITON	663-P	TRIAC
3	LUTRON	6683	TRIAC
4	LEVITON	6684	TRIAC
5	LUTRON	IP106	TRIAC
6	LEVITON	6672	TRIAC
7	LUTRON	6613-P	TRIAC
8	LEVITON	SCL-153P	TRIAC
9	LUTRON	AY-600P	TRIAC
10	LUTRON	D-603PH	TRIAC
11	LUTRON	LGCL-153PL	TRIAC
12	LUTRON	DV-603PG	TRIAC
13	LUTRON	TTCL-100H	TRIAC
14	LUTRON	DV-600P	TRIAC
15	LUTRON	AYCL-153P	TRIAC
16	LUTRON	DVCL-153PL	TRIAC
17	LEGRAND	CDLV703-PW	TRIAC
18	LEGRAND	D703-PTC	TRIAC
19	LEGRAND	DLV703-PLA	TRIAC
20	LEGRAND	H703PTCCCV6	TRIAC
21	COOPER	DLC03P	TRIAC
22	COOPER	9530WS	TRIAC

Specifications are typical values and may change without notification