




## G2SWP SECURITY WALL PACK

### DESCRIPTION

This Mini Wall Pack combines energy efficiency, customizable lighting options, and durability, making it ideal for outdoor lighting applications where compact size and high performance are essential.

### FEATURES

- Available in 15/20/30 Watt Versions
- CCT Options: 3000K/4000K/5000K
- Replaces up to 75W HID, 80W Incandescent or 36W CFL
- 5 Year Standard Warranty, 10 Year Optional
- Finish Options: Black, Custom Available
- Optional Photocell

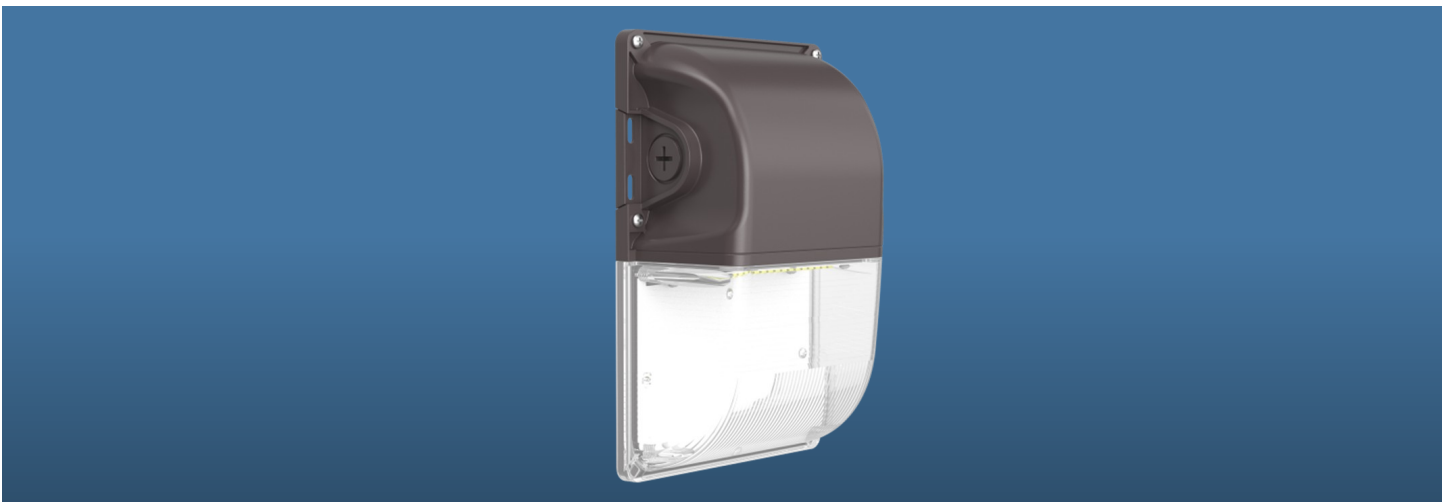




SPECIFICATIONS	
MODEL	G2SWP
WATTAGE	15W/20W/30W Selectable
LUMENS	1,950/2,600/3,900lm
EFFICACY	130lm/W
INPUT VOLTAGE	120-277VAC 50/60Hz
POWER FACTOR	>0.9
SURGE PROTECTION	2KV
CRI	>80
CCT	3000K/4000K/5000K Selectable
LIFE(L70)	50,000+ hours
BUG RATING	B1-U3-G3
BEAM ANGLE	100°
PROTECTION	Integral short circuit, open circuit, and overload protection
SYEGE PROTECTION	L/N 2KV, L/N-G 2KV
DRIVER EFFICIENCY	≥85%
DRIVER CLASS	Class II
DIMMING	0-10V
0-10V SINK CURRENT	<1mA
OPERATING TEMP.	-30°C to +50°C
STORAGE TEMP.	-30°C to +70°C
ENVIRONMENT	Wet Locations
IP RATING	IP65
HOUSING FINISH	Bronze
LENS MATERIAL	Polycarbonate
WEIGHT	1.98 lbs./ 0.9 Kgs.
DIMENSIONS	8.19 X 5.51 X 3.54 in.
FCC	FCC 47 CFR Part 15 Compliance
SAFETY CERTIFICATIONS	ETL
WARRANTY	5 Year Standard / 10 Year Optional

ORDERING GUIDE					JLS-G2SWP-M1-MCCT-BR-PC			
MODEL	-	WATT	-	CCT	-	HOUSING	-	OPTIONS
JLS-G2SWP		M1 = 15W/20W/30W		MCCT = 3000K/4000K/5000K		BR = Bronze		N = No option PC = Photocell

*Specifications are typical values and may change without notification*



**DIMENSIONS (Unit : mm/Inch)**

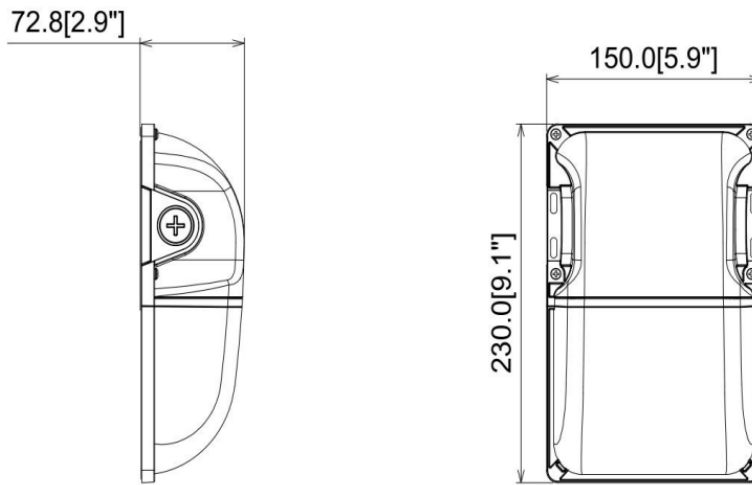

*Specifications are typical values and may change without notification*