



SURFACE MOUNT DRUM

DESCRIPTION

Low cost solution for utility ceiling lights. While cost effective, they still offer multi-CCT settings and a motion sensor option.

FEATURES

- 3 Selectable Wattages
- 120Vac 50/60Hz
- CCT: 3 Selectable CCTs, 3000K/4000K/5000K
- Dual Selectable Design
- Motion Sensor
- 5 Year Standard Warranty



Revised 7/30/2026

Specifications are typical values and may change without notification



JAYKAL
efficiency. illuminated

SURFACE MOUNT DRUM

SPECIFICATIONS			
MODEL	JLS-DRU		
SIZE	11inch	14inch	16inch
WATTAGE CODE	M1	M2	M3
POWER	8W/12W/15W selectable	14W/18W/25W selectable	18W/25W/30W selectable
INPUT VOLTAGE	120VAC 50/60 Hz		
POWER FACTOR	>0.9		
LUMENS	880lm/1,320lm/1,650lm	1,540lm/1,980lm/2,750lm	1,980lm/2,750lm/3,300 lm
EFFICACY	110 lm/W		
CRI	>80		
CCT	3000K/4000K/5000K Selectable		
THD	<50%		
LIFE (L70)	>50,000+ Hours		
ENVIRONMENT	Indoor and Damp Locations		
OPERATING TEMP.	-20°-45°C		
STORAGE TEMP.	-20°-70°C		
CONTROL	Microwave Motion Sensor		
DIAMETER	11 / 14 / 16 Inch		
FCC	FCC 47 CFR Part 15 Compliance		
WARRANTY	5 Year		

ORDERING GUIDE									EXAMPLE : JLS-DRU-14-M2-8MCCT-M		
MODEL	-	SIZE	-	WATTAGE		-	CCT	-	OPTIONS		
JLS-DRU		11 = 11 Inch 14 = 14 Inch 16 = 16 Inch		M1 = (8W, 12W, 15W) only for 11inch M2 = (14W, 18W, 25W) only for 14inch M3 = (18W, 25W, 30W) only for 16inch			8MCCT = (3000K,4000K,5000K)		Blank = No extra options M = Motion Sensor		

Specifications are typical values and may change without notification




efficiency. illuminated.



JAYKAL
efficiency. illuminated

SURFACE MOUNT DRUM

DIMENSIONS

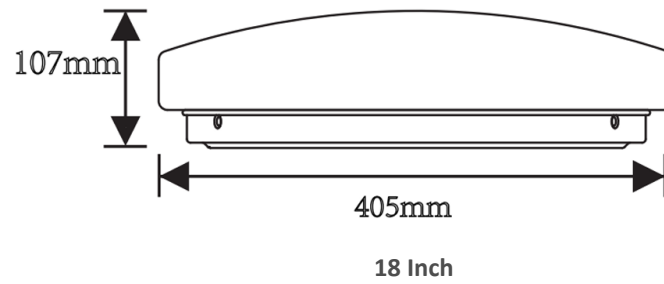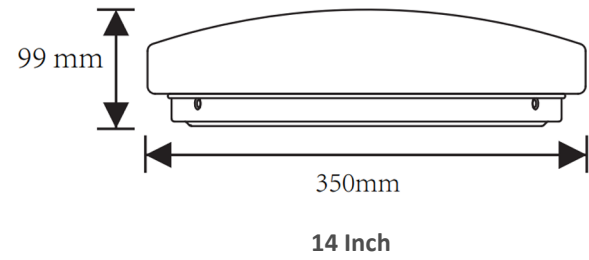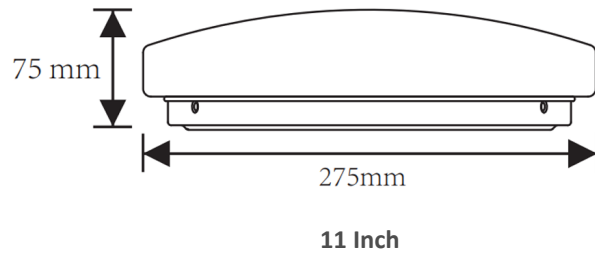

Specifications are typical values and may change without notification

efficiency. illuminated.