



M50 Vari-Watt Drivers (6 Presets)

DESCRIPTION


This multi-current output LED driver gives the installer the ability to field select the desired wattage for the fixture. Multiple output wattages are available using simple DIP switch settings.

The driver features integrated bi-level dimming with selections of 40%, 50%, 60% or defeated.

The driver features integrated 0-10V dimming compatible with wall dimmers and controls and 12VDC Aux output for powering sensors.

FEATURES

- DIP Switch Selectable Output Wattage (6 Presets)
- 50-50 Dimming & 0-10V Dimming Functions both available
- 12VDC AUX Output
- Metal Housing

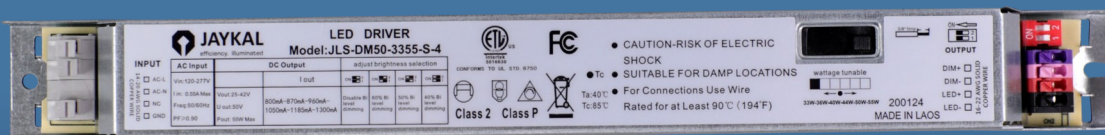

ETL CLASSIFIED



Revised 3/24/2026

Specifications are typical values and may change without notification



SPECIFICATIONS	
INPUT VOLTAGE	120-277VAC 50/60Hz +/- 10%
INRUSH CURRENT	<25A
HARMONICS (NOMINAL CONDITIONS)	Fully complies with EN61000-3-2
THD	<20%
INPUT CURRENT PROTECTION	Fuse (Internal)
FLICKER RATE	Meets or Exceeds IEEE Standard 1789-2015
CONTINUOUS FULL RANGE DIMMING	100% - 10% of full power (standard configuration), minimum 40W Analog dimming current draw 1.5mA per fixture. Maximum number of fixtures =sensor current / 1.5mA
POWER FACTOR	>0.9
OPERATING TEMPERATURE RANGE	-20°C to +50°C / -4°F to 122°F
OPERATING HUMIDITY	10 to 90% RH Non-Condensing
SURGE PROTECTION SPECIFICATION	L-N 1KV, LN-G 2KV
SELF-PROTECTION MECHANISM	Overvoltage protection/Short-Circuit protection/Open-Circuit protection
DIM TO OFF	Yes (for specified 0-10V dimmer only)
MAXIMUM CASE TEMPERATURE (Tc)	85°C / 185°F
FCC COMPLIANCE	FCC Part 15 Subpart A Class A

Specifications are typical values and may change without notification



MODEL JLS-DM50-0715-[MCCT,BLANK]-[12V,BLANK]-[S,FF]-4 (7W,9W,10W,11W,12W,15W) (M1)						
Wattage Settings	7W	9W	10W	11W	12W	15W
Input Voltage	120-277VAC 50/60Hz					
Input Current (Max)	0.08A@120V	0.1A@120V	0.11A@120V	0.12A@120V	0.13A@120V	0.16A@120V
Power Factor	>0.9					
THD @ 120V 60Hz (%)	<20%					
Efficiency @ 120-277V 60Hz (%)	87% at full load					
Output Voltage	DC 25-42V					
Output Current@120V	160mA +/-5%	200mA +/-5%	225mA +/-5%	250mA +/-5%	270mA +/-5%	340mA +/-5%
Wattage@60% Dimming	4.2W	5.4W	6.0W	6.6W	7.2W	9.0W
Wattage@50% Dimming	3.5W	4.5W	5.0W	5.5W	6.0W	7.5W
Wattage@40% Dimming	2.8W	3.6W	4.0W	4.4W	4.8W	6.0W
Current@60% Dimming	96mA +/-5%	120mA +/-5%	135mA +/-5%	150mA +/-5%	162mA +/-5%	204mA +/-5%
Current@50% Dimming	80mA +/-5%	100mA +/-5%	113mA +/-5%	125mA +/-5%	135mA +/-5%	170mA +/-5%
Current@40% Dimming	64mA +/-5%	80mA +/-5%	90mA +/-5%	100mA +/-5%	108mA +/-5%	136mA +/-5%
Protection	Open protection / Short protection / Overvoltage protection					
FCC Compliance	FCC Part 15 Subpart A Class A					

MODEL JLS-DM50-1830-[MCCT,BLANK]-[12V,BLANK]-[S,FF]-4 (18W,20W,22W,24W,27W,30W) (M2)						
Wattage Settings	18W	20W	22W	24W	27W	30W
Input Voltage	120-277VAC 50/60Hz					
Input Current (Max)	0.2A@120V	0.22A@120V	0.24A@120V	0.26A@120V	0.3A@120V	0.33A@120V
Power Factor	>0.9					
THD @ 120V 60Hz (%)	<20%					
Efficiency @ 120-277V 60Hz (%)	87% at full load					
Output Voltage	DC 25-42V					
Output Current@120V	400mA +/-5%	450mA +/-5%	500mA +/-5%	540mA +/-5%	610mA +/-5%	680mA +/-5%
Wattage@60% Dimming	10.8W	12W	13.2W	14.4W	16.2W	18W
Wattage@50% Dimming	9.0W	10W	11W	12W	13.5W	15W
Wattage@40% Dimming	7.2W	8.0W	8.8W	9.6W	10.8W	12W
Current@60% Dimming	240mA +/-5%	270mA +/-5%	300mA +/-5%	324mA +/-5%	366mA +/-5%	408mA +/-5%
Current@50% Dimming	200mA +/-5%	225mA +/-5%	250mA +/-5%	270mA +/-5%	305mA +/-5%	340mA +/-5%
Current@40% Dimming	160mA +/-5%	180mA +/-5%	200mA +/-5%	216mA +/-5%	244mA +/-5%	272mA +/-5%
Protection	Open protection / Short protection / Overvoltage protection					
FCC Compliance	FCC Part 15 Subpart A Class A					

Specifications are typical values and may change without notification





MODEL JLS-DM50-3355-[MCCT,BLANK]-[12V,BLANK]-[S,FF]-4 (33W,36W,40W,44W,50W,55W) (M3)						
Wattage Settings	33W	36W	40W	44W	50W	55W
Input Voltage	120-277VAC 50/60Hz					
Input Current (Max)	0.36A@120V	0.4A@120V	0.44A@120V	0.48A@120V	0.55A@120V	0.61A@120V
Power Factor	>0.9					
THD @ 120V 60Hz (%)	<20%					
Efficiency @ 120-277V 60Hz (%)	87% at full load					
Output Voltage	DC 25-42V					
Output Current@120V	750mA +/-5%	810mA +/-5%	900mA +/-5%	1000mA +/-5%	1130mA +/-5%	1250mA +/-5%
Wattage@60% Dimming	19.8W	21.6W	24W	26.4W	30W	33W
Wattage@50% Dimming	16.5W	18W	20W	22W	25W	27.5W
Wattage@40% Dimming	13.2W	14.4W	16W	17.6W	20W	22W
Current@60% Dimming	450mA +/-5%	486mA +/-5%	540mA +/-5%	600mA +/-5%	678mA +/-5%	750mA +/-5%
Current@50% Dimming	375mA +/-5%	405mA +/-5%	450mA +/-5%	500mA +/-5%	565mA +/-5%	625mA +/-5%
Current@40% Dimming	300mA +/-5%	324mA +/-5%	360mA +/-5%	400mA +/-5%	452mA +/-5%	500mA +/-5%
Protection	Open protection / Short protection / Overvoltage protection					
FCC Compliance	FCC Part 15 Subpart A Class A					

ORDERING GUIDE									
MODEL	-	WATTAGE	-	MCCT	-	AUX POWER	-	OPTION	CODE
JLS-DM50		0715 = 7/9/10/11/12/15W 1830 = 18/20/22/24/27/30W 3355 = 33/36/40/44/50/55W		Blank = No MCCT MCCT = With MCCT Function		Blank = Without 12VDC 12V = With 12VDC AUX		S = Standard FF = Flicker-Free	4

Specifications are typical values and may change without notification



DIMENSIONS

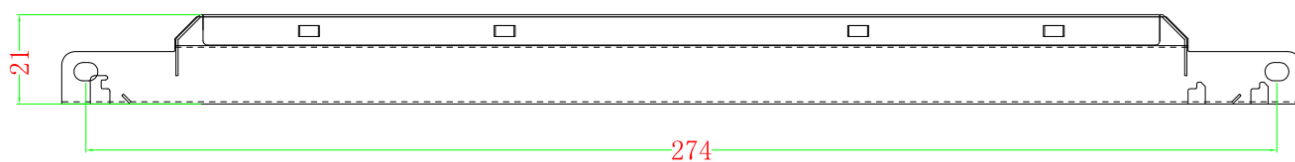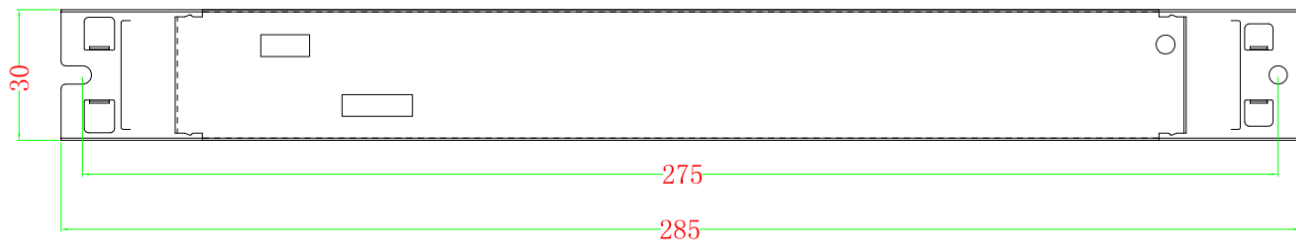

Product	Length End to End (in.)	Length Mounting Center (in.)	Height (in.)	Width (in.)
JLS-DM50-0715-MCCT-12V-S-4	11.22	10.83	0.83	1.18
JLS-DM50-1830-MCCT-12V-S-4				
JLS-DM50-3355-MCCT-12V-S-4				

Specifications are typical values and may change without notification