

BR LAMP



JAYKAL

PROJECT NAME:

JAYKAL LED SOLUTIONS, INC.

www.jaykal.net

PROJECT NOTES:

21499 Baltimore Ave.

Georgetown, DE 19947

(P) 302-295-0015

(F) 302-295-0016

FEATURES & BENEFITS

- ◆ Wattage Options : 7W/8W/10W/12W/17W
- ◆ CCT: 2700K/3000K/3500K/4000/5000K
- ◆ Input Voltage 120VAC
- ◆ Life (L70): 25,000+ Hours
- ◆ 5 Year Standard Warranty
- ◆ Damp Location Rated



RoHS 
Compliant

Revised 2/2/21

Specifications are typical values and may change without notification

efficiency. illuminated.

BR LAMP




JAYKAL

SPECIFICATIONS TABLE


MODEL	WATTAGE	LUMENS	EFFICACY	PF	BASE	VOLTAGE	CCT PRESETS	CRI	OP. TEMP.	LIFE(L70)
JLS-BR20-7-E26	7W	550lm	78lm/W	>0.7	E26	120V	2700K/3000K/4000K/5000K	>80	-20°-40°	25,000
JLS-BR30-8-E26	8W	650lm	81lm/W	>0.7	E26	120V	2700K/3000K/4000K/5000K	>80	-20°-40°	25,000
JLS-BR30-10-E26	10W	850lm	85lm/W	>0.7	E26	120V	2700K/3000K/4000K/5000K	>80	-20°-40°	25,000
JLS-BR40-12-E26	12W	1,050lm	87lm/W	>0.7	E26	120V	2700K/3000K/4000K/5000K	>80	-20°-40°	25,000
JLS-BR40-17-E26	17W	1,400lm	82lm/W	>0.7	E26	120V	2700K/3000K/4000K/5000K	>80	-20°-40°	25,000

DIMENSIONS


MODEL	DIMENSION
JLS-BR20	Φ63.5 x 97 mm / Φ2.5 x 3.82 inch
JLS-BR30	Φ95 x 130 mm / Φ3.74 x 5.12 inch
JLS-BR40	Φ120 x 159 mm / Φ4.72 x 6.26 inch

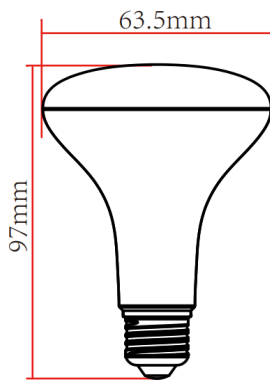

BR20 - 7W

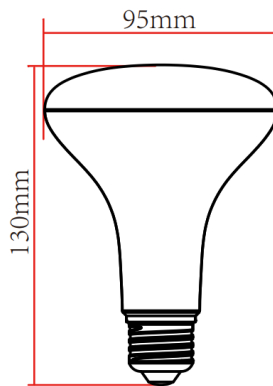

BR30 - 8W/10W

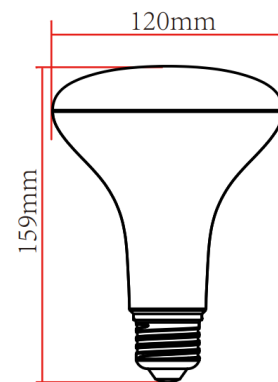

BR40 - 12W/17W

ORDERING GUIDE

JLS-BR30-10-840K-E26

MODEL	-	TYPE	-	WATTAGE	-	CCT	-	LAMP BASE
JLS		BR20 = BR20 Lamp BR30 = BR30 Lamp BR40 = BR40 Lamp		7 = 7W * 8 = 8W ** 10 = 10W ** 12 = 12W *** 17 = 17W *** * Only for BR20 ** Only for BR30 *** Only for BR40		827K = 2700K 830K = 3000K 835K = 3500K 840K = 4000K 850K = 5000K		E26 = E26 Base

Specifications are typical values and may change without notification

efficiency. illuminated.