




## G4SC SENSOR READY CANOPY LUMINAIRE

### DESCRIPTION

The G4SC Series of canopy luminaires features selectable wattage and CCT settings, giving the G4SC flexibility, efficiency, and durability for a wide range of industrial and commercial lighting applications.

### FEATURES

- Wattage & CCT Selectable
- Wattage Options : 10W-70W
- High Efficacy of up to 135lm/W
- CCT Options : 3000K/4000K/5000K Selectable
- Die Cast aluminum cooling design, high quality and better cooling
- Excellent Optics design, greatly improve the light utilization and evenness
- 5 Year Warranty, 10 Year Optional

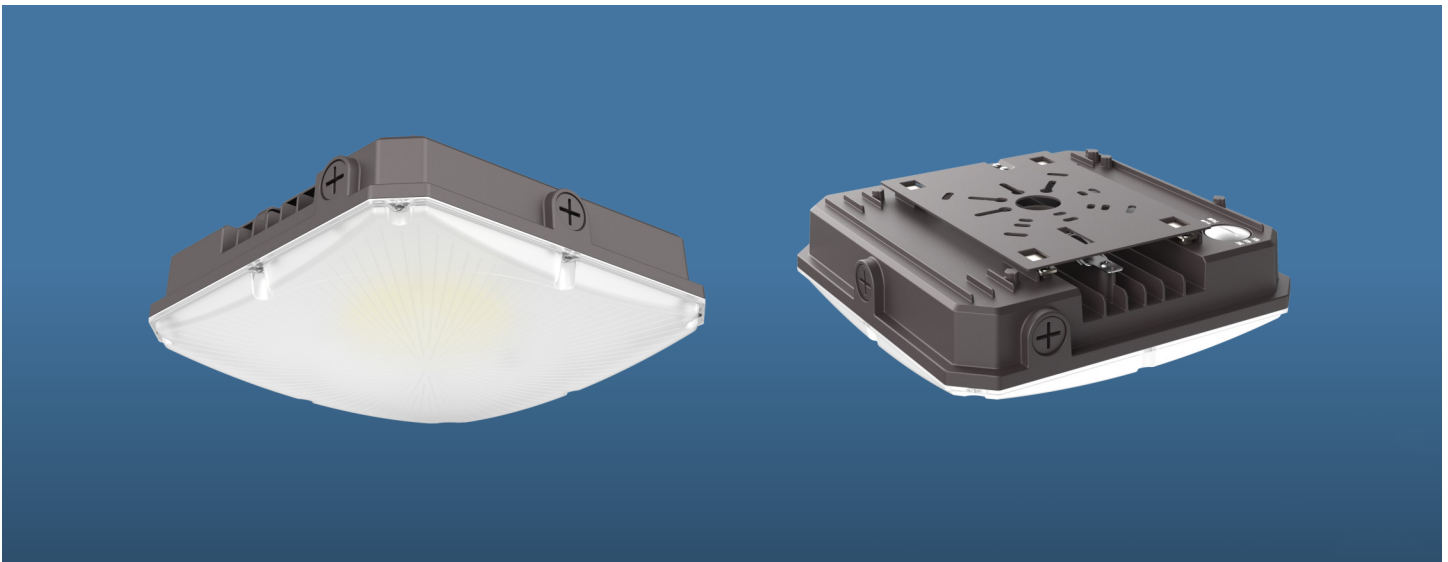




**SPECIFICATIONS**

<b>MODEL</b>	<b>JLS-G4SC</b>		
<b>INPUT VOLTAGE</b>	120-277VAC / 120-347VAC 50-60HZ		
<b>TYPE</b>	M1-	M2	M3
<b>WATTAGE</b>	40W/20W/10W Selectable	55W/35W/25W Selectable	70W/60W/40W Selectable
<b>EFFICACY</b>	135lm/W		
<b>LUMENS</b>	5,400lm/2, 700lm/1,350lm	7,425lm/4,725lm/3,375lm	9,450lm/8,100lm/5,400lm
<b>BUG RATING</b>	B2-U0-G2	B2-U0-G2	B3-U0-G2
<b>POWER FACTOR</b>	>0.95		
<b>THD</b>	<20%		
<b>L70 HOURS</b>	>50,000 Hours		
<b>CRI</b>	>80		
<b>CCT PRESETS</b>	3000K / 4000K / 5000K Selectable		
<b>DIMMING</b>	0-10V		
<b>DIMMING POWER RATING</b>	<1mA		
<b>BEAM ANGLE</b>	120°		
<b>SURGE PROTECTION</b>	5KV		
<b>OPERATING TEMP.</b>	-30°C - 50°C		
<b>IP RATING</b>	IP65		
<b>WARRANTY</b>	5 Year Standard Warranty, 10 Year Optional		
<b>FCC</b>	FCC Title 47 CFR Part 18 compliance		
<b>CERTIFICATIONS</b>	ETL/DLC		

**DIMENSIONS (Units : Inch/mm)**

<b>MODEL</b>	<b>LENGTH</b>	<b>WIDTH</b>	<b>HEIGHT</b>
JLS-G4SC	255mm/10.1 in.	255mm/10.1 in.	87mm/3.4 in.

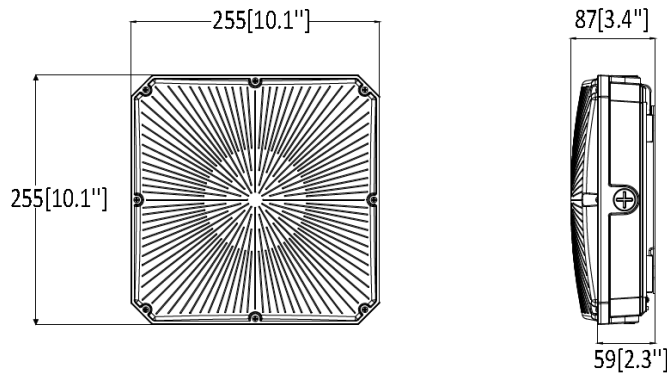

*Specifications are typical values and may change without notification*



ORDERING GUIDE					EXAMPLE: JLS-G4SC-M1-277-MCCT-M			
MODEL	-	WATTAGE	-	INPUT VOLTAGE	-	CCT	-	OPTIONS
JLS-G4SC		M1 = 40W/20W/10W M2 = 55W/35W/25W M3 = 70W/60W/40W		277 = 120-277VAC 347 = 120-347VAC		MCCT = 3000K/4000K/5000K Selectable		Blank = No extra option PC = Photocell M = Motion Sensor EM = Emergency Back Up

*Specifications are typical values and may change without notification*